



电性能参数

组件型号	B6MY21518L001	B6MY22018L001	B6MY22518L001
峰值功率 (Pmax)	215	220	225
峰值电压 (Vmp)	18.4	18.6	18.8
峰值电流 (Imp)	11.7	11.8	12.0
开路电压 (Voc)	22.6	22.8	22.9
短路电流 (Isc)	12.4	12.5	12.6

规格参数


组件型号	B6MY21518L001	B6MY22018L001	B6MY22518L001
电池片类型	单晶		
组件尺寸 (mm)	1324*992*35		
输出线长度 (mm)	900		
连接件	None/MC4		
组件重量 (kg)	14.4		

B6MY21518L001


B6PY22018L001

B6PY22518L001

正面图

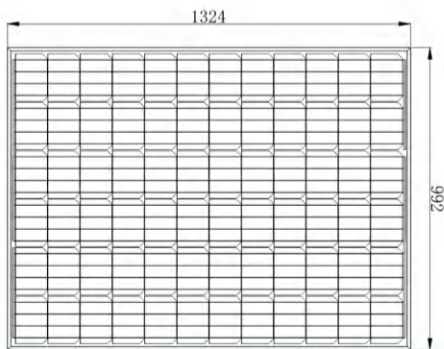

背面图

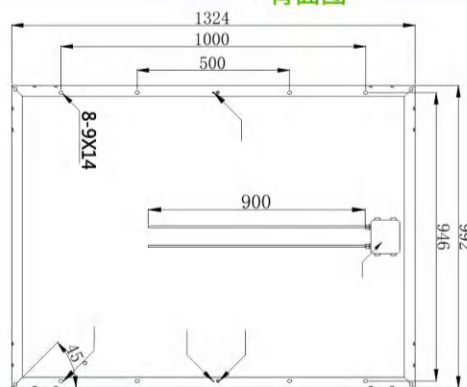

钢化玻璃
EVA胶膜
硅电池片
EVA胶膜
光伏背板
铝合金边框



- 高效光能转化率
- 绿色环保能源
- 为客户量身定制
- 使用寿命25年

